

HXP R 120 W/45 C VIS 2/CS 1/SKU



Product features and benefits

- High luminance / radiance with intense point source
- Broad spectral distribution in the visible and ultraviolet range
- Enhanced UV characteristics available on some types
- High arc stability

Areas of application

- Microscopy
- Laboratory & Analysis
- UV curing
- Fiber Illumination
- Microscopy
- Solar Simulation

Product datasheet

Technical data

General product information

Product Number	69119
Product Name	HXP R 120 W/45 C VIS 2/CS 1/SKU
Application	Medical and industrial fiber optics
Product Remark	<ul style="list-style-type: none">- p (Operating Position) = Horizontal- 125 mm (front ring to plug) and 95 mm (rear cap to plug) silicon cables terminated with MATE-N-LOK plug no. 350809-1 with pins no. 926868-3 by AMP Inc.- It takes time for the mercury in the lamp to evaporate. Typically 95% of luminous output are generated after approximately 120 seconds. For quality inspection purposes allow for five minutes burning time.- Excessive airflow may lead to mercury condensation in the discharge lamp bulb and consequently to a performance drop.- Operation time after which either aperture lumens decrease to 50% of initial value or the lamp voltage reaches 115 V and the lamp cannot be ignited. Switching cycle: 210 minutes on / 30 minutes off.- Operational bulb wall temperatures lower than 850°C may lead to mercury condensation and prevent the lamp from reaching stable operation conditions; temperatures higher than 950°C may lead to premature failures of the lamp.- Output is understood as total energy in the range 320 to 500 nm focusereflector.

Electrical data

Nominal Wattage	120 W
Nominal Voltage	85 V
Current (A)	1.4 A
Type of Current	AC

Light technical data

Luminous Flux	2800 lm
Beam Angle (degree)	22.4 deg
Working Distance a (mm)	45 mm
Color Temperature	9500 K
Average Rated Life	2000 h

Product datasheet

Physical attributes


Bulb Shape	T67
Maximum Overall Length (mm)	77 mm
Length l1 (mm)	77 mm
Length l1 max. (mm)	77 mm
Diameter d (in)	2.638 in
Diameter d (mm)	67.00 mm

Additional product data

Operating Position	p 20
Maximum Base Temperature (°C)	0 C
Hot Restart	Yes

Safety advice

Due to their high luminance, UV radiation, and high internal pressure in the hot state, HBO and HXP lamps may only be operated in enclosed lamp casings designed for their operation. Since mercury is released if the lamp breaks, special safety precautions must be taken. More information is available upon request, or can be found in the leaflet or operating instructions included with the lamp. You can also review our Product Safety Guide.

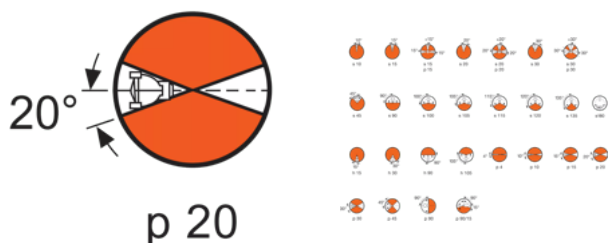

Packaging Information

Product number	EAN/UPC	Packaging	Quantity	Outside dimensions l x w x h	Gross weight
69119	4050300882772	Folding box (SKU)	1	4.1 in x 3.4 in x 3.4 in	0.4 lb
69119	4050300882789	Shipping box (Case)	2	7.3 in x 4.7 in x 3.9 in	0.8 lb

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Product datasheet

Disclaimer

OSRAM does not accept liability for errors, changes and omissions.